

INTRODUCTION


HoloFlite coolers are indirect screw heat exchangers for bulk materials. Heat present within hot solids entering the cooler is exchanged with circulated cooling water, thereby cooling the solids. The table below summarizes general design and operating capabilities of Metso:Outotec's HoloFlite coolers. All values below are indicative for reference only. Equipment designs and/or operating conditions for specific applications may differ from the details presented below. Consult Metso Outotec for additional information.

Parameter	Description
Configurations	
Screw Arrangements	Single, double, quadruple
Nominal Screw Diameters	Ø4 inches up to Ø36 inches in standard increments
Nominal Lengths	10-28 feet in standard 2 foot increments
Materials of Construction	Carbon steel, 304 stainless, 316 stainless, specialty alloys
Material Feed/Discharge	Rectangular flanged openings or flanged pipes
Orientation	Horizontal or inclined up to 15 degrees
Design Code	ASME Boiler & Pressure Vessel Code, Section VIII, Division I
Performance	
Processing	Continuous
Process Materials	Granular bulk solids
Material Particle Sizes	≤ 0.375 inch (typical)
Material Feed Temperatures	≥ 1,800°F
Heat Exchange Capability	Up to 12 MMBTU/hr
Screw Rotational Speed	1-10 RPM (typical)
Feeding Method	Gravity feed by an upstream metering device (by Others)
Discharge Method	Gravity discharge from the bottom
Heat Transfer Fluid	
Heat Transfer Medium	Cooling water or chilled water/glycol blends
Heat Exchange Direction	Parallel flow
Fluid Circulation Rate	Up to 600 GPM
Fluid Operating Pressure	Up to 150 psig
Fluid Operating Temperature	50-100°F (typical)


MODEL SIZE NOMENCLATURE

Unit Size & Type Designation:

Each Holo-Flite processor is designated by a group of numbers and letters arranged to specifically identify the unit as indicated to the right.

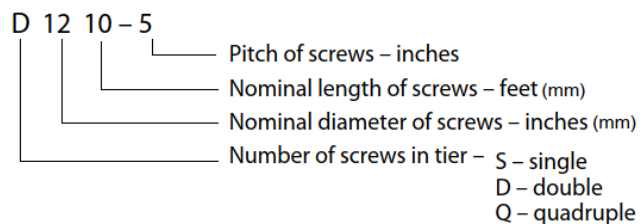


SINGLE SCREW MODEL SIZES

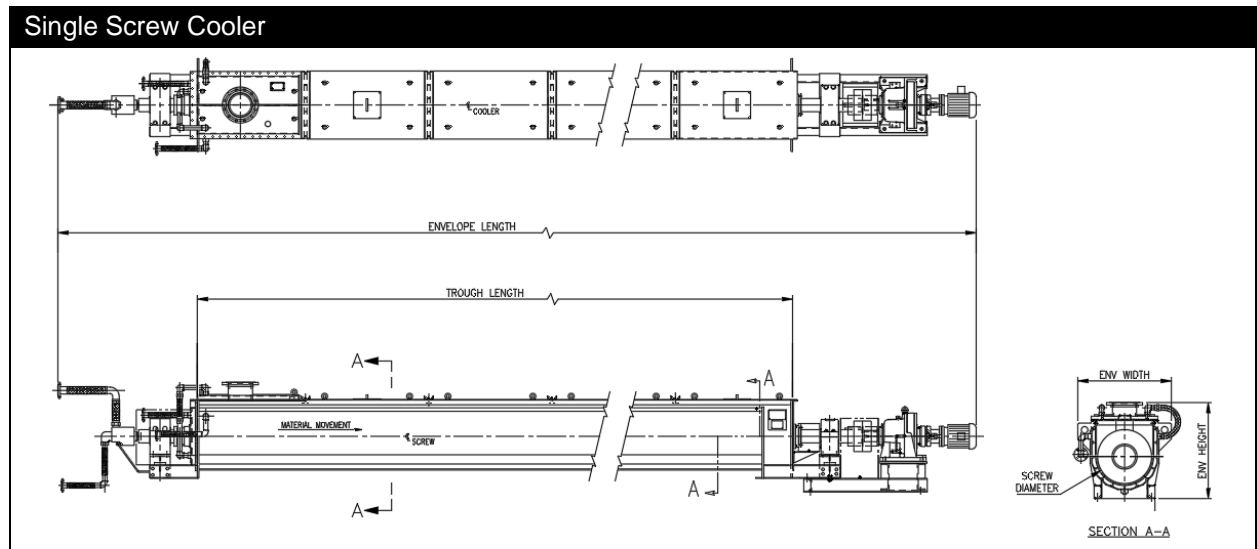


HoloFlite Model	Nominal Screw Diameter (in)	Nominal Trough Length (ft)
S0710-4	7	10
S0712-4	7	12
S0714-4	7	14
S1210-5	12	10
S1212-5	12	12
S1214-5	12	14
S1216-5	12	16
S1218-5	12	18
S1614-6	16	14
S1616-6	16	16
S1618-6	16	18
S2410-6	24	10
S2412-6	24	12
S2414-6	24	14
S2416-6	24	16
S2418-6	24	18
S2420-6	24	20
S2422-6	24	22
S2424-6	24	24
S3020-7	30	20
S3022-7	30	22
S3024-7	30	24
S3026-7	30	26
S3028-7	30	28
S3620-8	36	20
S3622-8	36	22
S3624-8	36	24
S3626-6	36	26
S3628-8	36	28

DOUBLE SCREW MODEL SIZES

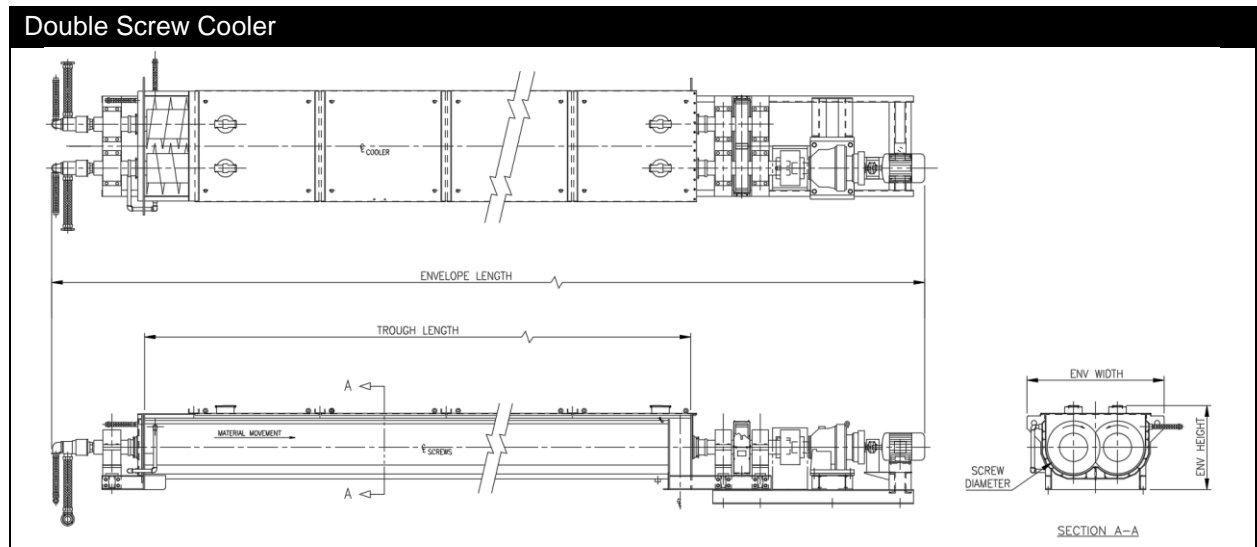

HoloFlite Model	Nominal Screw Diameter (in)	Nominal Trough Length (ft)
D0404-2	4	4
D0710-4	7	10
D0712-4	7	12
D0714-4	7	14
D1210-5	12	10
D1212-5	12	12
D1214-5	12	14
D1216-5	12	16
D1218-5	12	18
D1612-6	16	12
D1614-6	16	14
D1616-6	16	16
D1618-6	16	18
D2410-6	24	10
D2412-6	24	12
D2414-6	24	14
D2416-6	24	16
D2418-6	24	18
D2420-6	24	20
D2422-6	24	22
D2424-6	24	24
D3020-7	30	20
D3022-7	30	22
D3024-7	30	24
D3026-7	30	26
D3028-7	30	28
D3620-8	36	20
D3622-8	36	22
D3624-8	36	24
D3626-8	36	26
D3628-8	36	28

QUADRUPLE SCREW MODEL SIZES

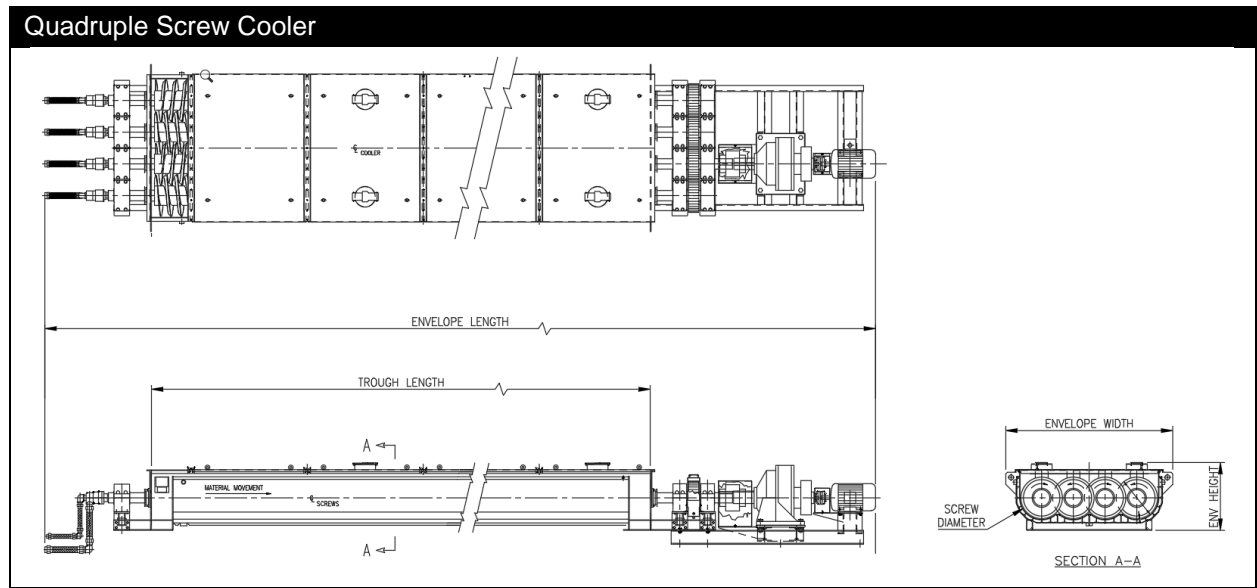

HoloFlite Model	Nominal Screw Diameter (in)	Nominal Trough Length (ft)
Q2414-6	24	14
Q2416-6	24	16
Q2418-6	24	18
Q2420-6	24	20
Q2422-6	24	22
Q2424-6	24	24
Q3020-7	30	20
Q3022-7	30	22
Q3024-7	30	24
Q3026-7	30	26
Q3028-7	30	28
Q3620-8	36	20
Q3622-8	36	22
Q3624-8	36	24
Q3626-8	36	26
Q3628-8	36	28